



Contact Us Today

[www.xiangletools.com](http://www.xiangletools.com)

[www.xiangleratchetstrap.com](http://www.xiangleratchetstrap.com)

[info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com)

+8613773290282

No. 18, Zhenxing Road, Yangshe Town, Suzhou, Jiangsu, China

**INNOVATING**  
TIE-DOWN SOLUTIONS  
**2026**



## Retractable | Ratchet Straps

**Part # FY2501**

- **Width:** 1 inch(25mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black/Green/Blue/Orange/Pink/Red/Grey
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating A3 Steel + 40Mn Steel+Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 1760lbs (800kgs)
- **Work load limit:** 586LBS(267kgs)

**Instant Pull-Out & Retract:** Features a self-retracting mechanism for immediate strap extraction and one-press tidy storage.

**Multiple Colors:** Help improve retail visibility, allow quick strap identification, and match any vehicle or brand, making your products stand out on the shelf.

**Compact Efficiency:** Space-saving, streamlined build ideal for tight spaces on motorcycles, UTVs, and trailers.

Patent Pending



**WARNING:**

NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.



Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282





## Retractable | Tie Down Strap

Part # FY5002

- **Width:** 2 inch(50mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating 45# Steel + 40Mn Steel, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** Black E-coating Swan Hook
- **Break Strength:** 3000lbs (1350kgs)
- **Work load limit:** 1000LBS(450kgs)

**AS/NZS 4380 Compliant:** Fully tested to meet Australia cargo restraint standards

**Precision Swan Hooks:** Specifically designed to fit securely onto Australian truck coaming rails and Ute tie-down points.

**Time-Saving Efficiency:** Cuts loading and unloading time by 50% compared to traditional manual ratchets.



Patent Pending

## Retractable | Tie Down Strap

Part # FY5001

- **Width:** 2 inch(50mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating 45# Steel + 40Mn Steel, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 3000lbs (1350kgs)
- **Work load limit:** 1000LBS(450kgs)

**Nylon Armor Shell:** Full-cover nylon housing prevents metal-to-cargo contact.

**Scratch-Free Hauling:** Specifically engineered to protect delicate cargo surfaces from scratches and damage.

**One-Touch Retraction:** Instant, tangle-free webbing storage with a single press.



Patent Pending

## Retractable | Tie Down Strap

Part # FY5003

- **Width:** 2 inch(50mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating 45# Steel + 40Mn Steel, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** Black E-coating E track
- **Break Strength:** 3000lbs (1350kgs)
- **Work load limit:** 1000LBS(450kgs)

**Optimized for Van Interiors:** Plugs directly into E-Track rails, keeping cargo secure and immobile during transit.

**Tangle-Free Logistics:** Straps stay clean and organized within the mechanism, extending product life and maintaining a professional appearance.

**Safety-First Tidiness:** Automatically stores all excess webbing inside the housing, eliminating trip hazards and tangled straps on the van floor



Patent Pending

Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282



WARNING:

NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.





**Retractable** | Transom Tie Down Strap

Part # FY5005

- **Width:** 2 inch(50mm)
- **Length:** 8.8FT (2.7m)
- **Color:** Black (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating 45# Steel + 40Mn Steel, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 3000lbs (1350kgs)
- **Work load limit:** 1000LBS(450kgs)
- **Bolt dimensions:** M12×25mm/M12×35mm/M12×80mm
- **Bolt Material:** 304 Stainless steel

**Permanent "Always-Ready" Mounting:** Stop wasting time searching for misplaced straps in your truck; these bolt-on units stay exactly where you need them, permanently mounted to your trailer frame.

**End of "Ramp Stress":** Avoid the pressure of a crowded boat ramp by securing your transom with a single pull and a simple click—no manual winding or feeding webbing required.



Patent Pending

**Retractable** | Transom Tie Down Strap

Part # FY5004

- **Width:** 2 inch(50mm)
- **Length:** 8.8FT (2.7m)
- **Color:** Black (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** Black E-Coating 45# Steel + 40Mn Steel, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook:** 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 3000lbs (1350kgs)
- **Work load limit:** 1000LBS(450kgs)
- **Bolt dimensions:** M12×35mm
- **Bolt Material:** 304 Stainless steel
- **Bolt plate:** Q235 steel+ Black E-coating

**Universal Frame Adaptability:** Stop worrying about misaligned holes on your boat trailer; the multi-slot adjustable base allows for a custom fit across various trailer brands and frame designs.

**Effortless One-Touch Launch:** Features our signature internal spring mechanism that recycles webbing instantly with a single press, allowing you to secure or release your boat in seconds.



Patent Pending



Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282



NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.



## Retractable | Ratchet Straps

Part # AB02

- **Width:** 1 inch(25mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black or Orange (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** A3 steel + Black E-coating, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook options:** 45# steel Vinyl Coated S-Hook, 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 1500lbs (680kgs)
- **Work load limit:** 500LBS(227kgs)

Patented

**Instant Retraction:** No more manual winding or flapping straps in the wind.

**One-Touch Operation:** Simple, fast, and secure—perfect for busy professionals and DIY users.

**Clean & Safe:** Keeps webbing off the ground, preventing oil stains and wear-and-tear.



## Retractable | Ratchet Straps

Part # AT02

- **Width:** 1 inch(25mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black or Orange (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** A3 steel + Black E-coating, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated
- **Hook options:** 45# steel Vinyl Coated S-Hook, 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 1500lbs (680kgs)
- **Work load limit:** 500LBS(227kgs)

Patented

**Instant Retraction:** No more manual winding or flapping straps in the wind.

**One-Touch Operation:** Simple, fast, and secure—perfect for busy professionals and DIY users.

**Clean & Safe:** Keeps webbing off the ground, preventing oil stains and wear-and-tear.



## Retractable | Ratchet Straps

Part # AT02-S

- **Width:** 1 inch(25mm)
- **Length:** 10FT (3.05m include hooks)
- **Color:** Black and yellow striped pattern
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** A3 steel + Black E-coating, Durable Nylon Spring Housing
- **Finish:** Black E-coating
- **Handle:** Rubber-coated and Custom logo
- **Hook options:** 45# steel Vinyl Coated S-Hook, 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 1500lbs (680kgs)
- **Work load limit:** 500LBS(227kgs)

Patented

**One-Touch Retraction:** Instant webbing storage with a single press.

**New Custom Handle:** Ergonomic T-grip for maximum leverage.

**High-Vis Design:** Yellow arrow pattern with durable heat-transfer print.

**Fast & Clean:** Zero tangles, 50% faster than standard straps.



WARNING:


NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.

Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282



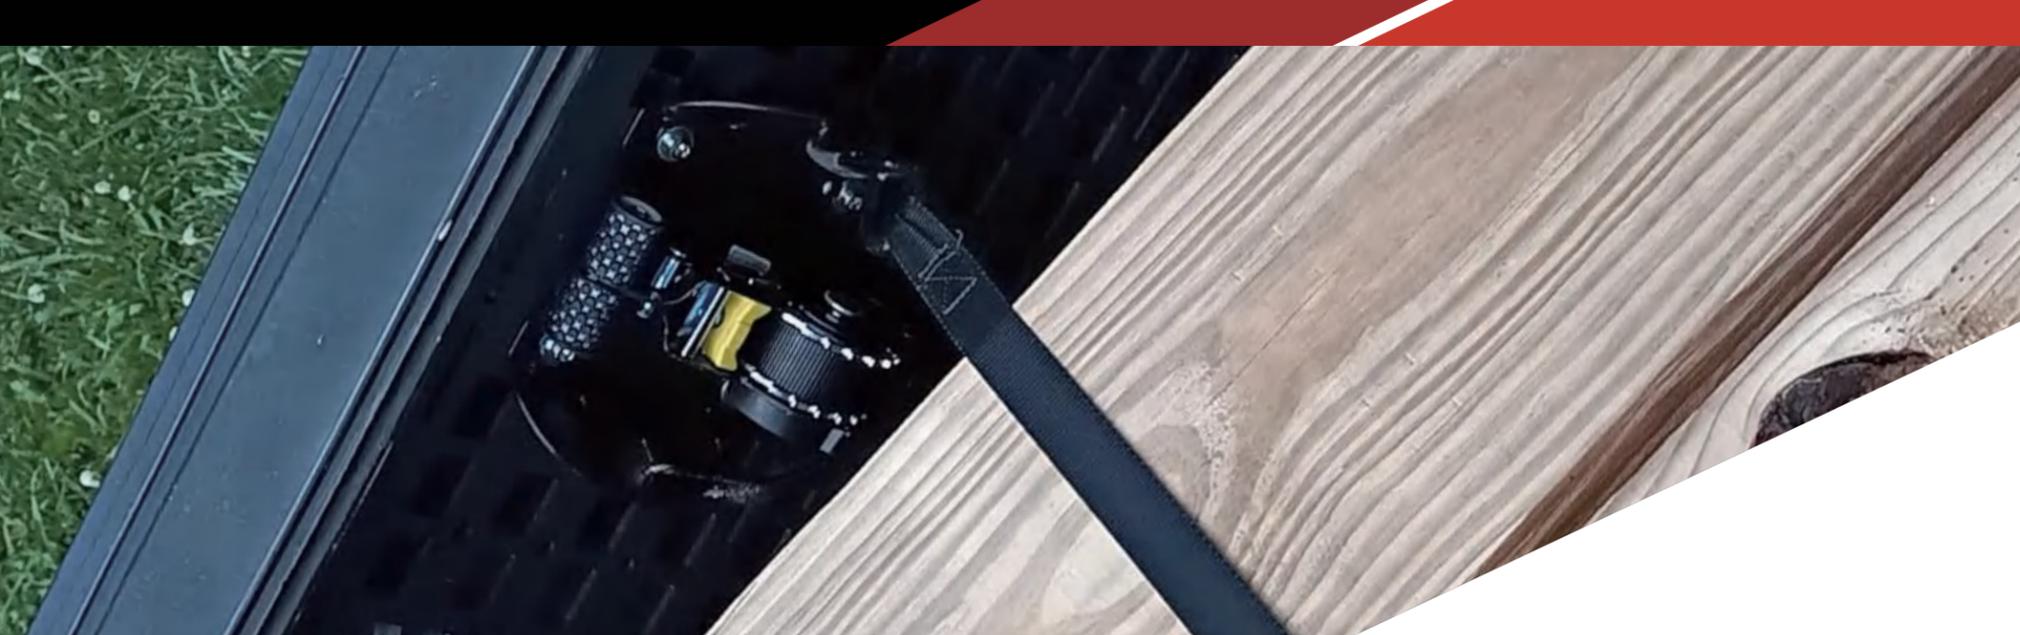

## Ultimate Retractable | Ratchet Straps for Ford BoxLink

Part # AT02-F

- **Ratchet section:**
- **Width:** 1 inch(25mm)
- **Length:** 8.8FT (2.7m)
- **Color:** Black or Orange (other color MOQ 1000pcs)
- **Strap material:** 100% high strength polyester yarn,AA grade
- **Ratchet material:** A3 steel + Black E-coating, Durable Nylon Spring Housing
- **Finish:** Black E-coating or white zinc coating
- **Handle:** Rubber-coated
- **Hook options:** 45# steel Vinyl Coated S-Hook, 45# steel Vinyl Coated S-Hook with clips
- **Break Strength:** 1500lbs (680kgs)
- **Work load limit:** 500LBS(227kgs)

**Metal plate section:**  
**Size:**20cm×12.6cm×2.5cm (7.9"×4.9"×1")  
**Thickness:**3.85mm(0.15 inch)  
**Metal:** Q235 Metal  
**Finish:**Black E-coating

**Screw:**  
 1pc M6×12mm 304 Stainless Steel Black E-coating Internal Hex Bolt  
 1pc M6×12mm 304 Stainless Steel Black E-coating Nut  
 1pc M6×12mm×1mm 304 Stainless Steel Black E-coating Washer  
 4pcs M6×25mm 304 Stainless Steel Black E-coating Internal Hex Bolt  
 1pc T30×50mm Chromium-vanadium steel sandblasted hex bit

**Ford BoxLink Ready:** Designed for a seamless, direct bolt-on fit to Ford F-Series BoxLink systems without any modifications.

**Auto-Retract Tech:** Instant webbing storage with one press—no more loose straps flapping in the wind.

**Always Available:** No more forgetting straps at home or getting them out of the toolbox.



NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.

Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282





Resistance-free ratchet

## Spin Free Ratchet Strap



### Spin Free | Ratchet Strap

Part # XLSFN25101

- **Size:** 25mm/1"
- **Bs:** 1763lbs/800kg
- **Buckle Color:** Black E-coating
- **Strap Material:** 100% polyester yarn
- **Length:** Customized length

Neutral-Gear quick-release design allows the webbing to pull out in one smooth motion, completely eliminating gear jamming and tangled strap frustration. With a high-grip studded T-handle, teardown time is reduced by up to 50%, delivering maximum speed, control, and efficiency for professional users.



WARNING:

NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.

Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282





## Motorcycle Tie Down Strap

| Swivel Carabiner

Part # XLMTD38201-3

- Size: 38mm/1.5"
- Bs: 1213lbs/550kg
- Cam Buckle Material: Zinc alloy
- Hook: Swivel Universal Carabiner Hook
- Strap Material: 100% polyester yarn
- Length: 6FT



## Motorcycle Tie Down Strap

| Swivel Carabiner

Part # XLMTD25201-1

- Size: 25mm/1"
- Bs: 1213lbs/550kg
- Cam Buckle Material: Zinc alloy
- Hook: Swivel Universal Carabiner Hook
- Strap Material: 100% polyester yarn
- Length: 6FT



**Anti-Tangle Swivel Tech:** The integrated high-strength swivel carabiner allows the strap to rotate freely, preventing the wind from twisting and knotting your tie-downs during high-speed highway transit.

**Paint-Safe Soft Loops:** Features integrated soft-tie loops at the top to secure your handlebars without any metal-on-metal contact, preserving your bike's finish and chrome.

**Anti-Tangle Swivel Tech:** The integrated high-strength swivel carabiner allows the strap to rotate freely, preventing the wind from twisting and knotting your tie-downs during high-speed highway transit.

**Paint-Safe Soft Loops:** Features integrated soft-tie loops at the top to secure your handlebars without any metal-on-metal contact, preserving your bike's finish and chrome.



WARNING:

NEVER, EVER HOOK THE STRAP AROUND A HITCH BALL FOR TOWING OR RECOVERY. THE HITCH/BALL CAN BREAK AND WILL CAUSE SERIOUS INJURY OR DEATH.

DO NOT EXCEED THE MAXIMUM BREAK STRENGTH OF THIS STRAP. STRAP SHOULD NOT BE USED IF ANY SIGNS OF WEAR OR DAMAGE ARE PRESENT.

KEEP AWAY FROM CHEMICALS OR EXCESSIVE HEAT(100 C). NOT MEANT TO BE USED FOR INDUSTRIAL LIFTING PURPOSES.

Contact Us Today | [info@xianglecargocontrol.com](mailto:info@xianglecargocontrol.com) | +8613773290282





Product No.	Color	Feature
XLFG0006BK	Black	Reflective
XLFG0006RD	Red	Reflective
XLFG0006BE	Blue	Reflective
XLFG0006OE	Orange	Reflective
XLFG0006PK	Pink	Reflective
XLFG0006YW	Yellow	Reflective
XLFG0006GH	Green	Reflective

## Adjustable | Motorcycle Luggage Strap


- **Product Name:** Super Strong Stable Bungee Cord
- **Length:** 60" (152cm)
- **Color:** Black / Red / Blue / Orange / Pink / Yellow / Green
- **Core Material:** 100% UV-resistant polyester yarn (reflective optional) + Solid oval rubber core
- **Buckle Material:** PVC
- **Breaking Strength:** 100lbs (45kg)

**Dynamic Tension Buffer:** Features a high-grade integrated rubber core that maintains constant tension, effectively absorbing shocks and vibrations on the most punishing terrains.



**Zero-Slack Performance:** Unlike static straps that loosen when cargo settles, our elastic buffer automatically compensates for movement, keeping your luggage rock-solid at high speeds.

**High-Visibility Style:** Available in 7 vibrant colors with precision stitching to match your bike's aesthetics while enhancing road safety.

Product No.	Color	Feature
XLFG0005BK	Black	Non-Reflective
XLFG0005RD	Red	Non-Reflective
XLFG0005BE	Blue	Non-Reflective
XLFG0005OE	Orange	Non-Reflective
XLFG0005PK	Pink	Non-Reflective
XLFG0005YW	Yellow	Non-Reflective
XLFG0005GH	Green	Non-Reflective

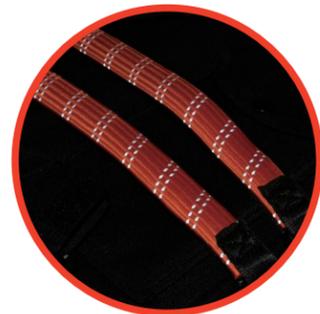

Reflective threads for enhanced night visibility

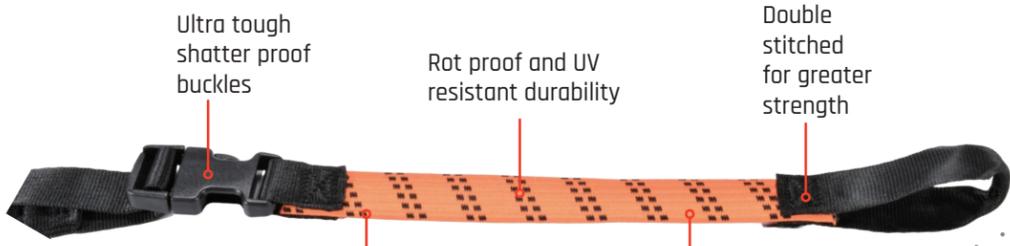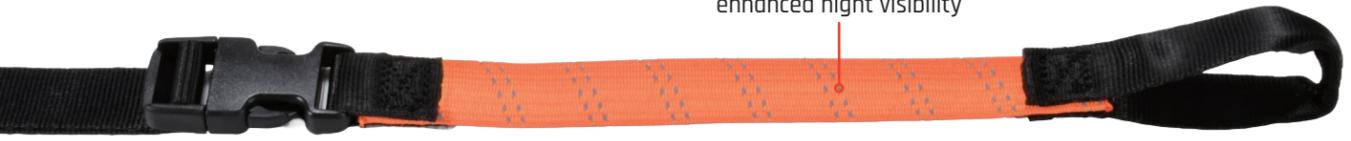

Ultra tough shatter proof buckles

Rot proof and UV resistant durability

Double stitched for greater strength

Roll resistant flat design is stronger and safer

Unique profile solid natural rubber core

